


Radialkolben-Konstant-Motoren

MS05 und MSE05

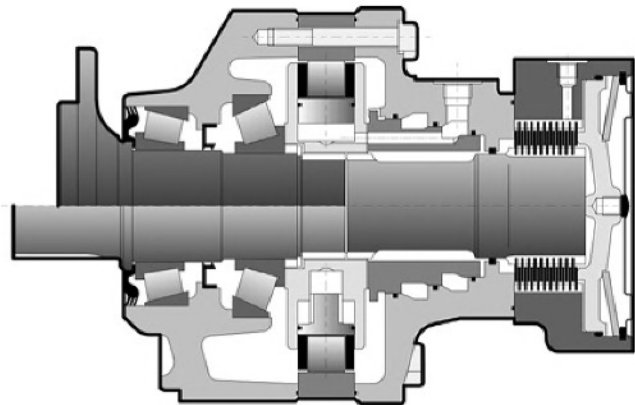

Motorträgheit: 0.03 kg/m²
Lärm: 60 dBA

Typ	① Hubvolumen (cm ³ /U)	② Hubvolumen (cm ³ /U)	① Drehmoment theoretisch (Nm) bei 100 bar	Max. Geschwindigkeit (U/min)	Max. Druck (bar)
MS05-6	260	130	413	265	450
MS05-8	376	188	598	250	450
MS05-0	468	234	744	240	450
MS05-1	514	257	817	220	450
MS05-2	560	280	890	220	450
MSE05-8	503	251.5	800	200	400
MSE05-0	625	312.5	994	190	400
MSE05-1	688	344	1094	175	400
MSE05-2	750	375	1193	160	400

① 1 Hubvolumen
② 2 Hubvolumen