


Radialkolben-Konstant-Motoren

MS08 und MSE08

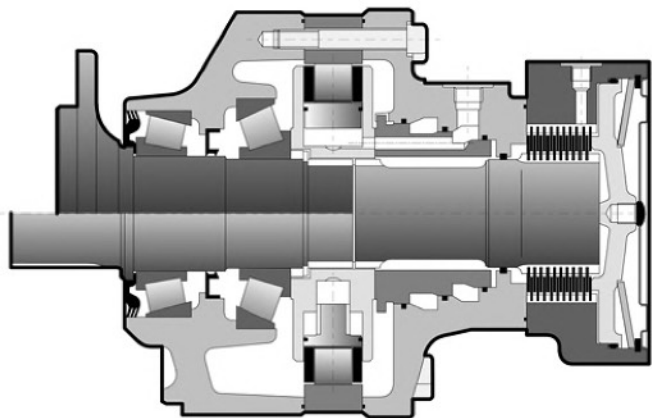

Motorträgheit: 0.05 kg/m²
Lärm: 60 dBA

Typ	① Hubvolumen (cm ³ /U)	② Hubvolumen (cm ³ /U)	① Drehmoment theoretisch (Nm) bei 100 bar	Max. Geschwindigkeit (U/min)	Max. Druck (bar)
MS08-6	467	234	743	210	450
MS08-8	627	314	997	210	450
MS08-9	702	351	1116	185	450
MS08-0	780	390	1240	170	450
MS08-1	857	429	1363	155	450
MS08-2	934	467	1485	140	450
MSE08-0	1043	522	1658	130	400
MSE08-1	1146	573	1822	110	400
MSE08-2	1248	624	1984	105	400

① 1 Hubvolumen
② 2 Hubvolumen