


# Radialkolben-Konstant-Motoren

## MS11 und MSE11

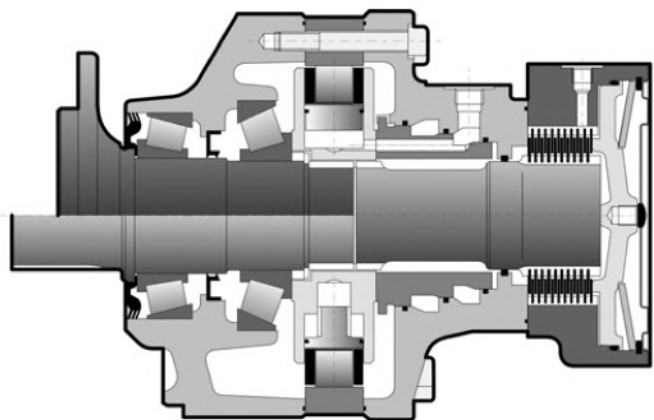

Motortr agheit: 0.05 kg/m<sup>2</sup>

Typ	① Hubvolumen (cm <sup>3</sup> /U)	② Hubvolumen (cm <sup>3</sup> /U)	① Drehmoment theoretisch (Nm) bei 100 bar	Max. Geschwindigkeit (U/min)	Max. Druck (bar)
MS11-7	730	365	1161	200	450
MS11-8	837	419	1331	195	450
MS11-9	943	472	1499	190	450
MS11-0	1048	524	1666	185	450
MS11-1	1147	574	1824	185	450
MS11-2	1259	630	2002	170	450
MSE11-9	1263	632	2008	170	400
MSE11-0	1404	702	2232	155	400
MSE11-1	1536	768	2442	140	400
MSE11-2	1687	844	2682	130	400

① 1 Hubvolumen  
② 2 Hubvolumen