


# Radialkolben-Konstant-Motoren

## MS18 und MSE18

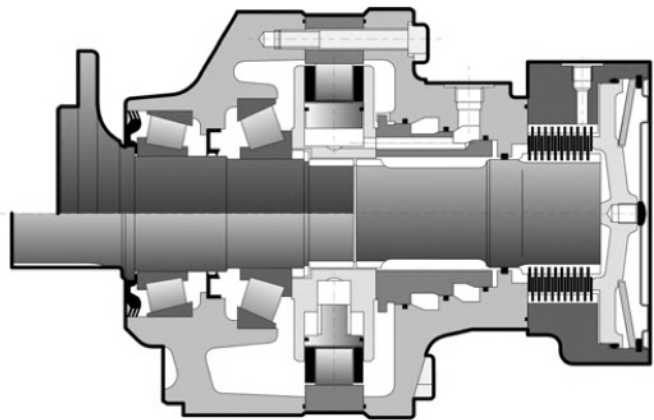

Motorträgheit: 0.2 kg/m<sup>2</sup>

Typ	① Hubvolumen (cm <sup>3</sup> /U)	② Hubvolumen (cm <sup>3</sup> /U)	① Drehmoment theoretisch (Nm) bei 100 bar	Max. Geschwindigkeit (U/min)	Max. Druck (bar)
MS18-6	1091	546	1735	170	450
MS18-8	1395	698	2218	155	450
MS18-9	1517	786	2498	140	450
MS18-0	1747	874	2778	125	450
MS18-1	1911	956	3038	115	450
MS18-2	2099	1050	3337	100	450
MSE18-0	2340	1170	3721	90	400
MSE18-1	2560	1280	4070	85	400
MSE18-1	2812	1406	4471	75	400

① 1 Hubvolumen  
② 2 Hubvolumen