


Schraubkupplungen

Flat Face, ISO 16028

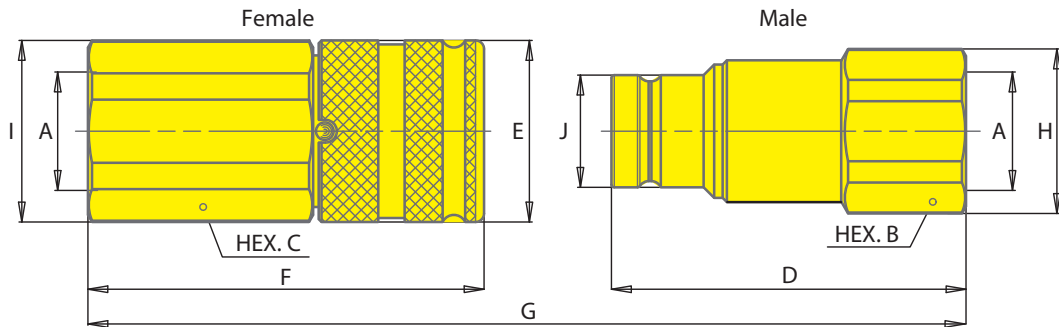

Bezeichnung	Grösse	A	Einheit	B	C	D	E	F	G	H	I	J	Einheit	Gewicht	
														Male	Female
A4	1/8	1/8	mm	17	19	36.3	20	40	68.4	18.5	20.5	11.6	kg	0.038	0.073
			inch	0.67	0.75	1.43	0.79	1.57	2.69	0.73	0.81	0.46	lb	0.08	0.16
A7	1/4	1/4	mm	22	27	47.9	28	53.1	90.2	23.8	29	16.1	kg	0.088	0.187
			inch	0.87	1.06	1.89	1.1	2.09	3.55	0.94	1.14	0.63	lb	0.19	0.41
A9	3/8	3/8	mm	27	30	60	32	64.8	108.8	29	32	19.7	kg	0.15	0.273
			inch	1.06	1.18	2.36	1.26	2.55	4.28	1.14	1.26	0.78	lb	0.33	0.6
A13	1/2	1/2	mm	36	36	68	38	76.8	127.5	40	40	24.5	kg	0.295	0.452
			inch	1.42	1.42	2.68	1.5	3.02	5.02	1.57	1.57	0.96	lb	0.65	1
A13	1/2	3/4	mm	36	36	70.5	38	83.8	137	40	40	24.5	kg	0.273	0.469
			inch	1.42	1.42	2.78	1.5	3.3	5.39	1.57	1.57	0.96	lb	0.6	1.03
A15	5/8	3/4	mm	36	41	73	42	84	139.4	38.5	44.8	27	kg	0.292	0.631
			inch	1.42	1.61	2.87	1.65	3.31	5.49	1.52	1.76	1.06	lb	0.64	1.39
A17	3/4	3/4	mm	46	46	83.7	48	95.8	157.5	49.8	49.8	30	kg	0.535	0.96
			inch	1.81	1.81	3.3	1.9	3.77	6.2	1.96	1.96	1.18	lb	1.18	2.12
A17	3/4	1	mm	46	46	83.7	48	98.8	160.5	49.8	49.8	30	kg	0.473	0.931
			inch	1.81	1.81	3.3	1.89	3.89	6.32	1.96	1.96	1.18	lb	1.04	2.05
A21	1	1	mm	55	55	96.8	55	104.8	178.6	59.8	59.8	36	kg	0.9	1.43
			inch	2.17	2.17	3.81	2.17	4.13	7.03	2.35	2.35	1.42	lb	1.98	3.15
A21	1	1/4	mm	55	55	90	55	105.8	172.8	59.8	59.8	36	kg	0.7	1.312
			inch	2.17	2.17	3.54	2.17	4.17	6.8	2.35	2.35	1.42	lb	1.54	2.89
A25	1 1/4	1	mm	55	55	105	65	125.1	206.8	59.8	65	44	kg	1.105	2.1
			inch	2.17	2.17	4.13	2.56	4.93	8.14	2.35	2.56	1.73	lb	2.44	4.63
A25	1 1/4	1/4	mm	55	55	105	65	125.1	206.8	59.8	65	44	kg	1.105	2.1
			inch	2.17	2.17	4.13	2.56	4.93	8.14	2.35	2.56	1.73	lb	2.44	4.63
A30	1 1/2	1	mm	65	65	111.1	80	132.4	214.9	69.8	82	57	kg	1.665	3.14
			inch	2.56	2.56	4.37	3.15	5.21	8.46	2.75	3.23	2.24	lb	3.67	6.92